

Q.PEAK DUO XL-G11S SERIES



580 - 595 Wp | 156 Cells
21.3 % Maximum Module Efficiency

MODEL Q.PEAK DUO XL-G11S.3 / BFG



Bifacial energy yield gain of up to 21%

Bifacial Q.ANTUM solar cells make efficient use of light shining on the module rear-side for radically improved LCOE.



Low electricity generation costs

Q.ANTUM DUO technology with optimized module layout to boost module power and improve LCOE.



A reliable investment

Double glass module design enables extended lifetime with 12-year product warranty and improved 30-year performance warranty¹.



Enduring high performance

Long-term yield security with Anti LID and Anti PID Technology², Hot-Spot Protect.



Frame for versatile mounting options

High-tech aluminum alloy frame protects from damage, enables use of a wide range of mounting structures and is certified regarding IEC for high snow (5400 Pa) and wind loads (2400 Pa).



Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behavior.

¹ See data sheet on rear for further information.

² APT test conditions according to IEC/TS 62804-1:2015 method B (-1500V, 168 h) including post treatment according to IEC 61215-1-1 Ed. 2.0 (CD)

The ideal solution for:




Ground-mounted
solar power plants



Q.PEAK DUO XL-G11S SERIES

Mechanical Specification

Format	2462 mm × 1134 mm × 30 mm (including frame)
Weight	34.3 kg
Front Cover	2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	2 mm semi-tempered glass
Frame	Anodised aluminium
Cell	6 × 26 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm ² Solar cable; (+) ≥ 750 mm, (-) ≥ 350 mm
Connector	Stäubli MC4-Evo2, Hanwha Q CELLS HQC4; IP68

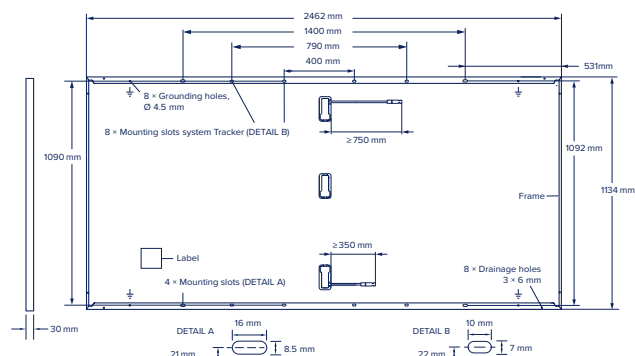

Electrical Characteristics

POWER CLASS	580	585	590	595
-------------	-----	-----	-----	-----

MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC¹ (POWER TOLERANCE +5 W / -0 W)

			BSTC*	BSTC*	BSTC*	BSTC*
	Power at MPP ¹	P _{MPP} [W]	580	585	590	595
Minimum	Short Circuit Current ¹	I _{SC} [A]	13.69	14.99	13.72	15.01
	Open Circuit Voltage ¹	V _{OC} [V]	53.55	53.74	53.57	53.76
	Current at MPP	I _{MPP} [A]	13.03	14.25	13.07	14.30
	Voltage at MPP	V _{MPP} [V]	44.53	44.52	44.75	44.74
	Efficiency ¹	η [%]	≥ 20.8	≥ 21.0	≥ 21.1	≥ 21.3

Bifaciality of P_{MPP} and I_{SC} 70% ± 5% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


¹Measurement tolerances P_{MPP} ± 3%; I_{SC}, V_{OC} ± 5% at STC; 1000 W/m²; *at BSTC: 1000 W/m² + φ × 135 W/m², φ = 70% ± 5%, 25 ± 2 °C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²

			436.7	440.5	444.2	448.0
Minimum	Power at MPP	P _{MPP} [W]	436.7	440.5	444.2	448.0
	Short Circuit Current	I _{SC} [A]	11.03	11.05	11.07	11.09
	Open Circuit Voltage	V _{OC} [V]	50.64	50.67	50.69	50.72
	Current at MPP	I _{MPP} [A]	10.25	10.30	10.34	10.38
	Voltage at MPP	V _{MPP} [V]	42.60	42.79	42.97	43.15

²800 W/m², NMOT, spectrum AM 1.5

Qcells PERFORMANCE WARRANTY	PERFORMANCE AT LOW IRRADIANCE
-----------------------------	-------------------------------

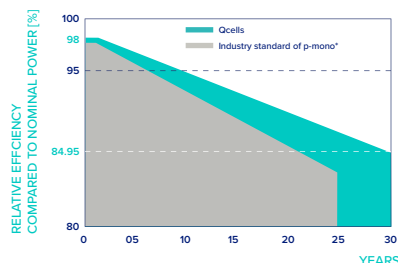


At least 98% of nominal power during first year. Thereafter max. 0.45% degradation per year. At least 93.95% of nominal power up to 10 years. At least 84.95% of nominal power up to 30 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

PERFORMANCE AT LOW IRRADIANCE

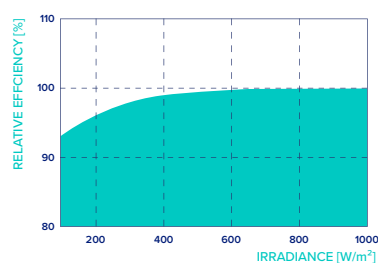

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS						
--------------------------	--	--	--	--	--	--

Temperature Coefficient of I _{SC}	α	[%/K]	+0.04	Temperature Coefficient of V _{OC}	β	[%/K]	-0.27
Temperature Coefficient of P _{MPP}	γ	[%/K]	-0.34	Nominal Module Operating Temperature	NMOT	[°C]	42 ± 3

Properties for System Design

Maximum System Voltage	V _{sys}	[V]	1500	PV module classification	Class II
Maximum Series Fuse Rating	I _R	[A]	25	Fire Rating based on ANSI/UL 61730	C/TYPE 29 ⁴
Max. Design Load, Push/Pull ³		[Pa]	3600/1600	Permitted Module Temperature on Continuous Duty	-40 °C - +85 °C
Max. Test Load, Push/Pull ³		[Pa]	5400/2400		

³ See Installation Manual

⁴ New Type is similar to Type 3 but with metallic frame

Qualifications and Certificates

Quality Controlled PV -
TÜV Rheinland;
IEC 61215:2016;
IEC 61730:2016.
This data sheet complies
with DIN EN 50380.



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS GmbH Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.qcells.com

qcells