

Features

- $\pm 5\%$ Voltage Regulation
- $\pm 15\%$ Accepted Input Voltage Range
- Overload Capacity up to 400% on Intermittent Startups
- Surge Suppressor Included
- Automatic Shut Off
- Quiet Operation and Minimal Heating
- Original Patents
- 99% Efficiency
- Correction Time: 8 Milliseconds (Immediate)
- Digital Display with LEDs
- Input / Output Terminal Block (Clamps)

Solves the Following Power Quality Issues

- High Voltage Surge
- Low Voltage Surge
- Sustained High Voltage
- Sustained Low Voltage
- Electrical Noise
- Voltage Spikes


Applications

- Household Appliances
- Telecommunications
- Computer Equipment
- Robotics
- Audiovisual Equipment
- Medical and Laboratory Equipment
- Printers and Plotters
- Lighting Systems
- Automated Assembly Lines
- CNC Machines

Optional

- Electrical Parameter Reports: Voltage, Current, Power and kWh
- Isolation Transformer / Autotransformer



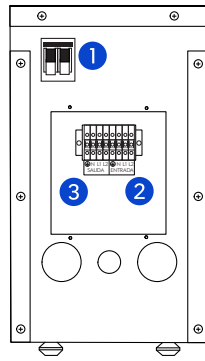

- 1 On / Off Switch
- 2 Input Terminal Block
- 3 Output Terminal Block

| Model: AMCR | 5204 | 5206 | 5210 | 5215 |
|---|---|-------|---------|---------|
| Input | | | | |
| Capacity (kVA / kW) | 4 / 4 | 6 / 6 | 10 / 10 | 15 / 15 |
| Input Voltage (V) | 120 / 208 | | | |
| Overload Protection | Thermal magnetic output circuit breaker / fuse (depends on the model) | | | |
| Range (Accepted) | ± 15% | | | |
| Operational Frequency | 60 Hz ± 10%, does not alter frequency* | | | |
| Harmonic Distorsion | Less than 2% THD | | | |
| Power Factor | Does NOT alter, adaptable to load requirement | | | |
| Output | | | | |
| Voltage Regulation Range | ± 5% (typical) | | | |
| Power Supply Impedance | Less than 2% | | | |
| Sustained High/Low Voltage Protection | Contactor or relay on the output, automatic shut off (depends on the model) | | | |
| Correction Time | Immediate, 8.3 milliseconds (1/2 cycle) | | | |
| Reset | Automatic (programmed at factory) | | | |
| Reset Time | 3 second standard time ** | | | |
| Physical | | | | |
| Recommended Use | Domestic, commercial and/or industrial, non vibratory, indoor use | | | |
| Input / Output Connectors | Terminal block (clamps) (G, N, L1, L2)** | | | |
| Transformers | Electrolitic copper magnetic wire and silicon steel sheet | | | |
| Cooling & Ventilation | Natural convection | | | |
| Cabinet | Galvanized steel sheet metal | | | |
| Paint Finish | Primer and electrostatic epoxy powder coating | | | |
| Maximum Operating Altitude (mamsl) | 3,000 | | | |
| Operational Temperature (°C) | 0 - 40 | | | |
| Relative Humidity | 0 - 95% without condensation | | | |
| Dimensions, height x width x depth (mm) | 460 x 270 x 450 | | | |
| Weight (kg) | 18 | 21 | 28 | 35 |
| Technology | | | | |
| High Frequency Noise Protection | PI Filter | | | |
| Control Technology | Microcontroller | | | |
| Monitoring (Operational Status) | LED´s / display (depends on the model) | | | |
| Measurement Parameters | Voltage, current, power and kWh | | | |
| Electronic Conmutation | TRIACs | | | |
| Electrical | | | | |
| Transformer | Type H | | | |
| Surge Suppressor | Varistors on the output | | | |
| Efficiency | 98% minimum | | | |
| Overload Capacity | Up to 400% in intermittent startups | | | |

* Tolerance available under evaluation of the Engineering department ** Factory configurable on request
 The specifications are subject to changes and modifications without prior notice, due to our commitment of continuous improvement of reliability, design and functionality of our products